



Inductive Elements

Transzformátorok Transformatoren Transformers


Típus / Typ / Type: EE-42/20H-EMKxx

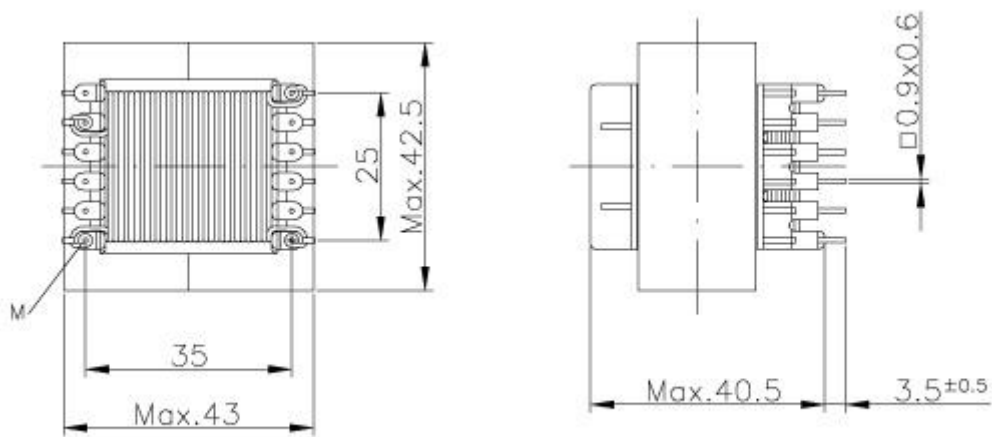

●: Tekercselés kezdete
Wicklungsanfang
Start of winding



Lábkiosztás /
Rasterplan /
Grid:

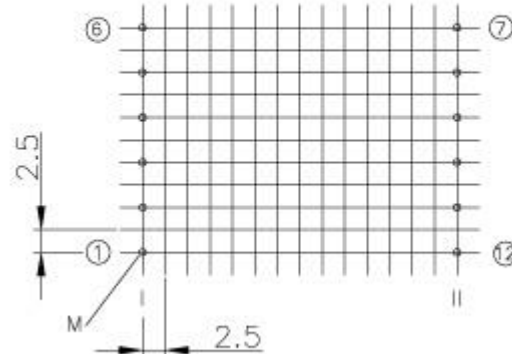

Megrendelési szám / Bestellnummer / Order number [xx]									
[- x]	Anyag / Werkstoff / Material	Al +30% -20% (nH)	$\mu\epsilon$	Al min (nH)	Pv (mW / g)				Súly / pár Gewicht / Satz Weight / pair (g)
					f=16 kHz B=200mT T=100C	f=25 kHz B=200mT T=100C	f=100 kHz B=100mT T=100C	f=300 kHz B=50mT T=100C	
1	M2TN-B	4200	1500	3360	≤ 20	≤ 35	-	-	180
2	M2TN-C	4450	1600	3560	-	≤ 20	≤ 30	-	180
3	M2TN-D	4200	1500	3360	-	-	≤ 23	≤ 30	180

A tekercskivezetések igény szerinti kialakításban
Drosselabklemme werden nach Bedarf ausgestaltet
Chokeoutputs formed according to demands